



Elektrometal Energetyka SA



HV protection unit e²TANGO-2000[®]-LRR (Line differential protection)



FR2 LINIA 110kV

Ekotermat Energetyka SA

STEROWANIE
POLCNY

Ekotermat Energetyka SA

STEROWANIE POLCNY

Zak. sterowania / sterowanie polcny

U1 = 0.50 A
U2 = 0.50 A
U3 = 0.50 A
U12 = 0.50 V
U23 = 0.50 V
U31 = 0.50 V
F = 0.00 Hz
P = 0.00 W
Q = 0.00 var

ERR: 005

STEROWANIE POLCNY

Ekotermat Energetyka SA

ZARZADZANIE
PROJEKTY
PROJEKTY

Ekotermat Energetyka SA

ZARZADZANIE PROJEKTY

Zak. sterowania / sterowanie projekty

U1 = 0.50 A
U2 = 0.50 A
U3 = 0.50 A
U12 = 0.50 V
U23 = 0.50 V
U31 = 0.50 V
F = 0.00 Hz
P = 0.00 W
Q = 0.00 var

ERR: 005

ZARZADZANIE PROJEKTY

Ekotermat Energetyka SA



WE CREATE IDEAS WITH POWER!

The family of the e²TANGO-2000-series HV protection relays has been developed by our R&D team consisting of engineers with extensive practical knowledge and many years of experience in the industry. The idea behind creating a high-voltage protection automation platform was to provide clients with operational surety of hardware, software, and algorithms.

The e²TANGO-50, e²TANGO-100, e²TANGO-150, e²TANGO-200, e²TANGO-250, e²TANGO-400, e²TANGO-450 e²TANGO-600, e²TANGO-800, e²TANGO-1000, e²TANGO-1200 protection relays and bay controllers for MV have been installed in thousands of facilities across the country and Europe. The hardware platform is based on the same central unit as for the e²TANGO series, of course, with the same configuration of processors, memory cards, inputs/outputs, etc. This makes us absolutely convinced that a few years of trouble-free operation of the e²TANGO series hardware gives security for applications in sensitive areas of HV stations and switchgears.

The e²TANGO-2000 software was developed on the basis of proven versions for MV controllers, while the algorithms of protections operation were developed in cooperation with the Institute of Power Engineering in Warsaw. Thanks to this, the user can be sure that the applied solutions have been tested over the last few decades and work reliably in many HV facilities in Poland and Europe.

The safety of the HV protection relays' users and operated power facilities was our priority when creating e²TANGO-2000. Therefore, in addition to the certainty of the hardware and software side, we have performed a full type testing completed with a certificate confirming the workmanship quality of the HV protection relays series.



Dariusz Rybak
Chief Designer of the e²TANGO series
Elektrometal Energetyka SA



APPLICATION OF HV PROTECTIONS

The e²TANGO HV protections portfolio constitutes a wide range of protection automation devices, including overcurrent and earth-fault protections, differential protection of transformer, voltage regulator, and line differential protection. The e²TANGO-2000 protection units can be used in bays with the various intended use and operating nature, e.g., in HV line bays or HV/MV transformer bays, but also in facilities of distribution, industrial and other power engineering, which have high-voltage (HV) stations.



HV line bay

- line differential protection
- automatic reset




HV recipients



HV station

HV LINE BAY DIAGRAM

A diagram of HV line bays with marked places for installing the e²TANGO-2000-type protection automation is presented below.

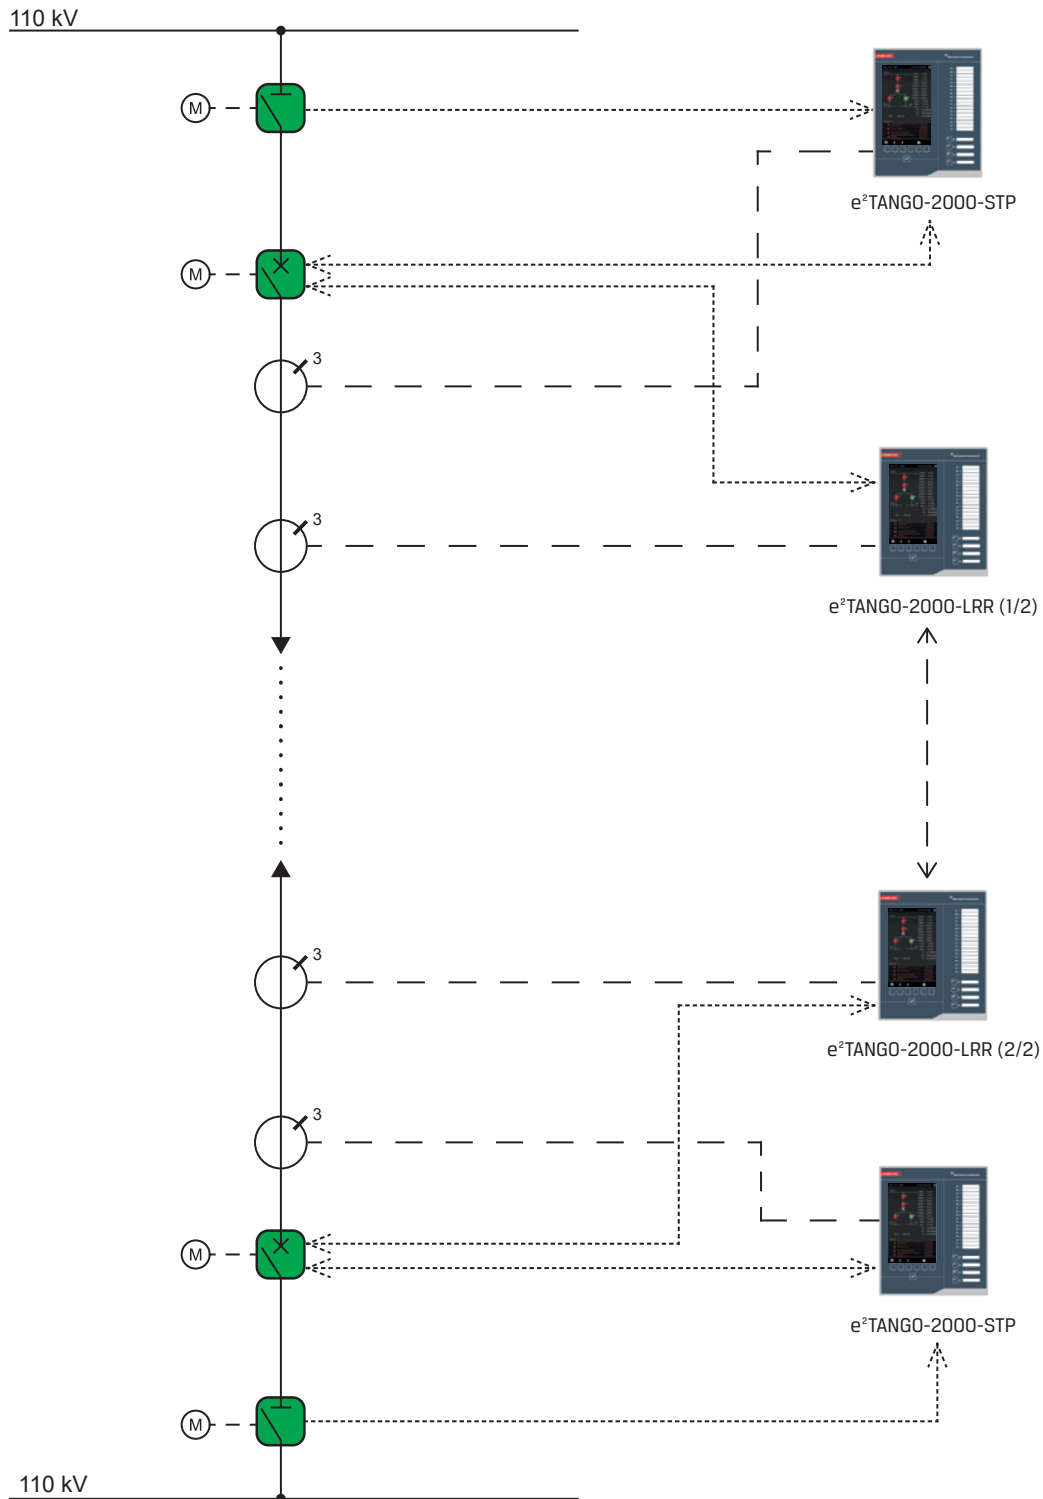

A comprehensive solution for the HV line bay, which includes all protection automation elements based on the e²TANGO platform, is demonstrated. The overcurrent and earthfault protection (STP) and line differential protection (LRR) have been constructed based on the e²TANGO-2000.

ADVANTAGES OF HV PROTECTIONS



spinning reserve
restoring the bay to work after a failure within several minutes, possibility to restore all bay data, e.g.: settings, logic, events





remote service access
remote and local readout of diagnostic data with the possibility of sending it to the manufacturer's service




tested algorithms
protection algorithms developed in cooperation with the Institute of Power Engineering




verified hardware base
basing on proven hardware and software of e²TANGO MV controllers

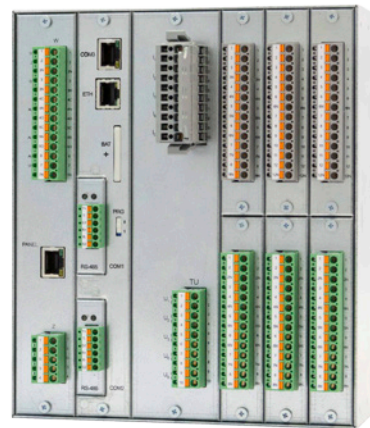

intuitive interface
legible menu layout, pictorialness of captions and markings



high interference resistance
up to 100% higher than required by the standard




wide range of hardware configurations
6-, 10-, 14-slot units are available with surface, flush or mixed installation method



expansion cards diversity
modular design based on expansion and communication cards, up to 168 inputs and up to 39 outputs

Intuitive and easy-to-use e²TANGO HV protection units are equipped with a fully configurable, clear screen and extensive configuration, registration, and measurement functions. The legibility of indications and signalling, easy access to documentation and instructions, easy verification of logic operation, and graphical verification of protections characteristics or remote service access definitely improve daily work with the device.



preview of the diagram and logic current status
logic and synoptic diagrams



complete operating manual
quick access to the associated chapters of the technical documentation

legible menu
pictorialness of captions and markings

graphic presentation of parameters
phasors, harmonics content


fully configurable graphic interface
up to five configurable screens, rich widget base

Parameter	Description	Range
TRP	TRP signalisation operation	Signal: Pulse
WRN	WRN signalisation operation	Signal: Pulse; Autoclear
AL	Autoclearing	

HELP
can be operated without the manual
quick-access help

DESIGN

The e²TANGO-series HV protections consist of two elements: operator panel and central unit. The central unit is made based on expansion cards and comes in three housing versions: J6 (6 cards), J10 (10 cards) and J14 (14 cards) - depending on the complexity of the switchboard bay layout and user's needs. The e²TANGO-2000 operator panel has a 7-inch, high-resolution colour screen.

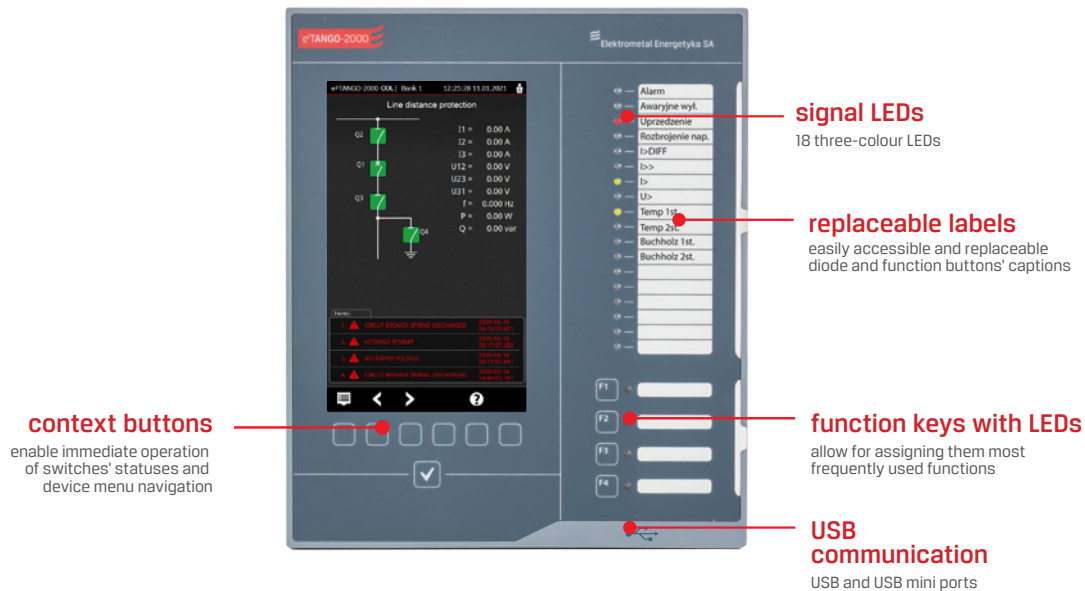

context buttons
enable immediate operation of switches' statuses and device menu navigation

signal LEDs
18 three-colour LEDs

replaceable labels
easily accessible and replaceable diode and function buttons' captions

function keys with LEDs
allow for assigning them most frequently used functions

USB communication
USB and USB mini ports

INTERFACE AND OPERATION	
Display	7"
Display resolution	800x480 px
Colour display	•
Touch screen	0
Context buttons (quantity)	-
Control buttons (v)	0
Programmable function keys with LEDs	4
LED	18
Virtual LED (on LCD)	0
Virtual function keys (on LCD)	0
Replaceable labels	•
DESIGN AND EQUIPMENT	
Panel dimensions (external - HxWxD)	252x215x41,5
Mounting opening dimensions in flush version	228x191
External central unit	•
J6 unit	0
• 6 slots	
• dimensions: 222x187x103 (HxWxD))	
J10 unit	•
• 10 slots	
• dimensions: 222x234x103 (HxWxD)	

J14 unit	0
• 14 slots	
• dimensions: 222x281x103 (HxWxD)	
STANDARD EQUIPMENT**	
Number of binary inputs (max.*)	28 (168)
Number of binary outputs (max.**)	23 (39)
Max. number of switches	12/31***
Analogue inputs 4-20 mA (max.)**	0 (4/8***)
Analogue inputs 0-10 V (max.)**	0 (4)
Analogue outputs 4-20 mA (max.)**	0 (4)
Analogue output 0-10 V (max.)**	0 (4)
Temperature inputs (max.)**	0 (6/12***)
OTHER	
Widgets	•
Number of configurable screens	5
Logic preview on display	•

•/o - standard/option

* - for the largest unit available and with all slots occupied with one type of card

** - the required number of expansion cards

*** available on special request

PROTECTION FUNCTIONS

27/27P	Undervoltage
46	Phase balance or reverse sequence current protection
50/50N/50Ns/50G	Overcurrent / ground overcurrent protection
50HS/SOTF	Switch on to fault / Accelerated Action of Protection - AAP
51/51N	Inverse overcurrent protection
51/51N/51Ns/51G	Time overcurrent / ground time overcurrent protection

51N/59N	Ground time overcurrent with voltage interlock
59/59P/59_L1/59_L2	Overvoltage
59N	Ground overvoltage
62	External binary protection
67/67N/67Ns/67G	Directional overcurrent / ground directional overcurrent protection
74TCS	Trip, close coil supervision
87L/87LG	Line / Ground Line differential

AUTOMATION

- (25) Synchronism-Check
- (50BF) Breaker failure protection
- (79) Auto reclose

ENHANCED CYBER-SECURITY STANDARD*

In order to increase security and protect against unauthorised access, a software version with enhanced cyber security elements has been created in the e²TANGO-2000 protection relays. To order this solution, it should be entered in the „additional requirements“ field in the order form.

The extended software includes:

- Event log in terms of SYSLOG support
- Role-based access mechanism (RBAC)
- 12-character password

Event log

The event log contains information on device security events and critical system information. It allows the sequence of events and system information related to the device to be reconstructed at any time. It records and stores information related to user actions, system events and data access, providing a detailed description of what happened in the device system.

The event log stores up to 2048 events in a circular buffer before the oldest events are overwritten by the newest ones. It is not possible to delete or clear the event log stored in the device memory. It is possible to download the event log to external memory.

RBAC - Role-based access control


Role-based access control (RBAC) is a mechanism for controlling access in computer systems and applications in organization. RBAC provides a flexible and scalable approach to managing user access by defining roles and assigning permissions based on those roles. Keys components of RBAC are Roles, Permissions and Users.

Roles represent collection of permissions that usually apply to certain job function or responsibility within an organization. It defines what action and operations a user assigned to the role is allowed to perform when logged into IED. In power system engineering such roles are usually defined as: Viewer, Operator, Engineer, Installer, SECADM, SECAUD, RBACMNT. e²TANGO allows to define 5 roles. Each role has editable name and have capability of assigning any combination of permissions.

In e²TANGO up to 10 users can be defined. The construction of the password must consist at least of:

- At least one uppercase and one lower case letter
- At least one number
- At least one non-alphanumeric character

* a special version at the Client's request

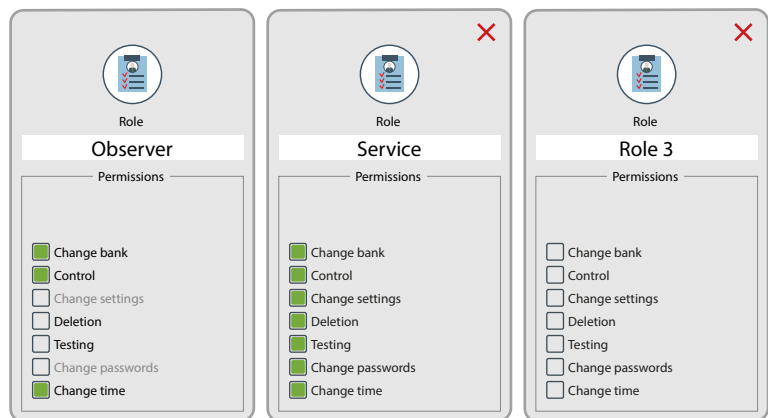

EXPANSION CARDS

PRIMARY CARDS

- power supply or power supply with reinforced contacts (connection ability up to 10 A DC)
- processor



FUNCTION CARDS

- 8 binary inputs
- 12 binary inputs
- 8 relay outputs
- 4 relay outputs with reinforced contacts (connection ability up to 10 A DC)



MEASURING CARDS

- standard (4I+5U)
- optional (5I+4U)



TEMPERATURE CARDS

- 6 temperature inputs PT100



ANALOGUE CARDS

- 4 analogue inputs 0-10 V
- 4 analogue inputs 4-20 mA
- 4 analogue outputs 0-10 V
- 4 analogue outputs 4-20 mA



PORTS AND COMMUNICATION PROTOCOLS

- Ethernet
- Single-mode optical fibre - OPTOSM
- Multi-mode optical fibre - OPTOMM
- Plastic optical fibre - OPTOP
- RS485
- CANbus 2x
- USB 2.0
- WiFi*
- Modbus RTU/TCP
- IEC 60870-5-103
- DNP 3.0
- Profibus
- CANbus/PPM 2
- IEC 61850








* after agreement with the manufacturer

RECORDERS

- event recorder, 1000 events
- interference recorder up to 160 s sampling frequency 1.6 - 3.2 kHz
- recording of instantaneous values, TrueRMS
- phasor diagram


DIMENSIONS

e²TANGO-2000

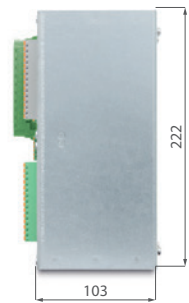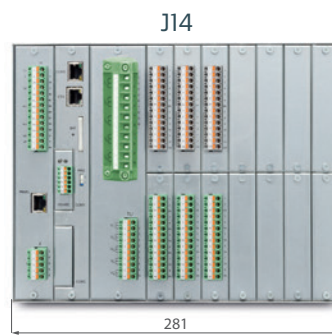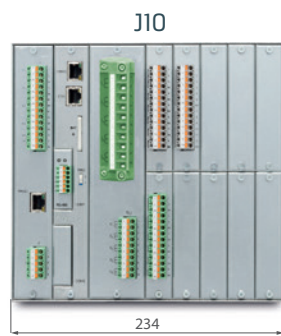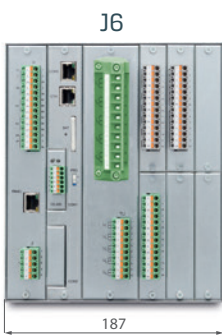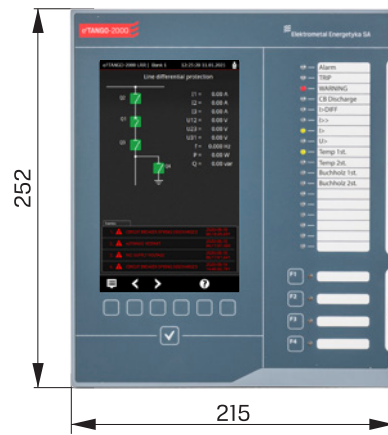


INSTALLATION METHODS


flush installation

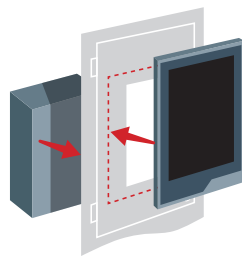


surface installation

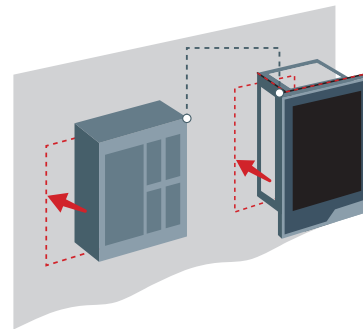

mixed installation

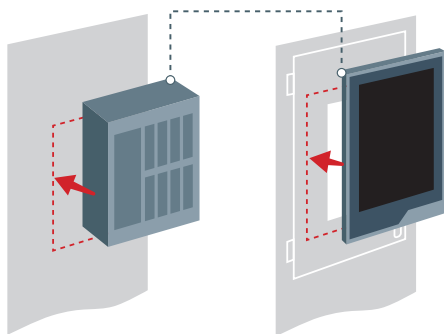

installation in a rack cabinet

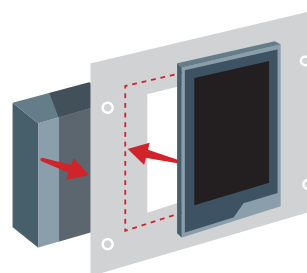

TECHNICAL PARAMETERS

POWER SUPPLY WITH AUXILIARY VOLTAGE	
DC voltage	110 V, 220 V (80-300 V DC)
AC voltage	230 V (88-265 V AC)
Option	24-48 V (19-58 V AC/DC)
Max. power consumption (panel and unit)	30 W (VA)
CURRENT MEASUREMENT CIRCUITS	
Rated current	1 A or 5 A
Rated frequency	50 Hz
Phase current measurement range	0.05-150 A
IO current measurement range	0.1-100 A
VOLTAGE MEASUREMENT CIRCUITS	
Rated voltage	57,7/100 V
Rated frequency	50 Hz
Voltage measurement range	3-120 V
MEASUREMENT ACCURACY	
I_1, I_2, I_3 (0.1-150 A)	1%
U_1, U_2, U_3, U_0 (5-120 V)	1%
I_0 (0.1-100 A)	1%
P, Q, EC, EB (U>5 V, 0.1 A<I<10 A)	1%
f (U>5V)	10 mHz
$\varphi_1, \varphi_2, \varphi_3, \varphi_0$ (U>5 V, 0.1 A<I<10 A)	1°
PROTECTIONS PARAMETERS	
Overcurrent protections operate time	typically 35 ms
Line differential protection operate time	typically 20 ms
Reset ratio of overload protections	Configurable
Reset ratio of underload protections	Configurable

PARAMETERS OF W1, W2, W3 BINARY OUTPUTS (BREAKER CONTROL)	
Voltage on open contacts	250 V AC, 440 V DC
Circuit activation at 220 VDC	5 A
Circuit deactivation at 220 VDC (L/R = 40 ms)	0.3 A 5 A (for PSUHI card)
Circuit deactivation at 220 VAC (cos $\varphi = 0.4$)	2 A
PARAMETERS OF BINARY OUTPUTS (OTHER)	
Voltage on open contacts	250 V AC, 440 V DC
Permanent load	5 A
Circuit deactivation at 220 VDC (L/R = 40 ms)	0.1 A 5 A (for OUTH card)
Circuit deactivation at 220 VAC (cos $\varphi = 0.4$)	2 A
PARAMETERS OF BINARY INPUTS	
Rated voltage	110/230 V AC/DC
Optional	24-48 V (19-58 V AC/DC)
Other on request	
Maximum current consumption at 220 V DC; 230 V AC	2 mA; 15 mA
ENVIRONMENTAL CONDITIONS	
Operating temperature	-10°C to +55°C
Storage temperature	-25°C to +70°C
Relative humidity	5% to 95%, without water vapour condensation
Vibrations and mechanical impacts	Class I acc. to IEC 60255-21
Electromagnetic interferences	Class B acc. to IEC 60255-26
SAFETY	
Insulation electric strength	2 kV/50 Hz/60 s acc. to IEC 60255-27
DIMENSIONS	
Weight (central unit/operator panel)	5 kg/1 kg
Central unit dimensions (WxDxH mm)	222x103x187/234/281
Central unit protection class	IP 3X/IP 4X (option)
Panel protection class (front plate side)	IP 4X/IP 54 (option)

e²TANGO-STUDIO SOFTWARE

The e²TANGO-Studio is an engineering program dedicated to the e²TANGO bay controller and, at the same time, a configuration tool for the panel. The programme has been developed and equipped with a rich set of functionalities, which, combined with a clear visual configuration of widgets, becomes excellent support in everyday work, enabling the creation of projects for many devices, panels, switchboards, or stations.



advanced designing

possibility of preparing the devices' configuration for the whole switchboard on the PC and its distribution using USB

user elements

defining customised graphic elements of the synoptic diagram



quick configuration assistant

facilitating the first use of the programme and support during regular work



on-line preview

live preview of I/O statuses, measurements; real preview of the image displayed on the LCD screen


displaying compliance

preview of the actual view of the panel screen



possible further expansion

using plug-ins




visual characteristics' shaping

graphical and standard configuration of protections' settings


prosta weryfikacja nastaw i selektywności

presentation of the whole overcurrent protections' family presentation on one chart




full statuses' view

access to all internal statuses of the device and protections



instant user screen designing

placement of elements supported by drag&drop method

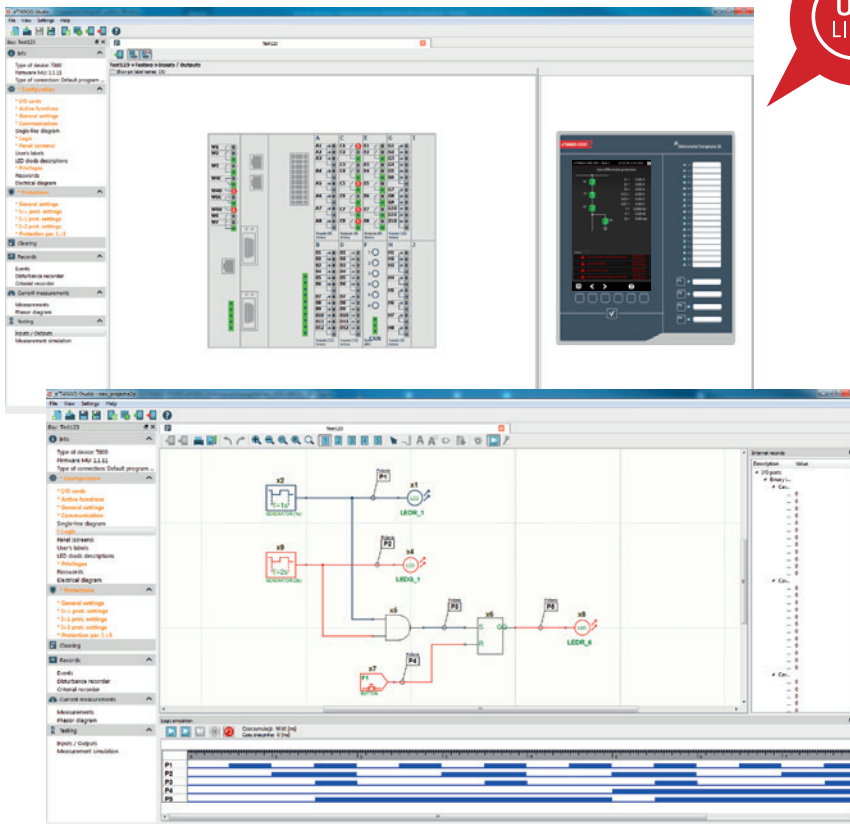


logic simulator

possibility of full simulation of logic without connecting to the device

logic legibility

possibility of dividing the logic into blocks and sheets



operation of extended logical dependencies

up to 340 logical gates/functors

ADVANCED LOGIC EDITOR AND SIMULATOR

The e²TANGO-Studio features an advanced and extended logic editor that allows for simulating the logic circuit, also visible from the panel, without connecting the device. It allows previewing logical statuses while working with the device, which facilitates project preparation, as well as commissioning and servicing of switching stations. It gives the possibility to design non-standard logics dedicated to the requirements of the client's infrastructure.

STANDARISATION

PN-EN 60255-1	Measuring relays and protection equipment. Part 1: Common requirements
PN-EN 60255-26	Measuring relays and protection equipment. Part 26: Electromagnetic compatibility requirements
PN-EN 60255-27	Measuring relays and protection equipment. Part 27: Product safety requirements

CERTIFICATES AND AWARDS



IEEn Certificate of Compliance
for the e²TANGO-2000 HV
protection units



International DNV-GL (KEMA)
Certificate of Compliance
for the IEC 61850 Protocol



Gold medal
ENERGETAB 2015 trade fair



Minister of Energy Cup
ENERGETAB 2018 trade fair



Mazovian Quality Award



Forbes Diamonds 2025

ELEKTROMETAL ENERGETYKA SA QUALITY

Integrated Management System is implemented in the company, based on the following standards:

- PN-EN ISO 9001 Quality Management Systems
- PN-EN ISO 14001 Environmental Management Systems
- PN-EN ISO 45001 Occupational Health and Safety Management Systems

ORDER FORM

To order the e²TANGO-2000 protections, please fill in this part of the form according to the INSTRUCTIONS FOR FILLING IN THE FORM on the next page.

STEP 1

① panel version	<input checked="" type="checkbox"/> 2000-LRR ¹⁾				
② central unit version	<input checked="" type="checkbox"/> J6	<input type="checkbox"/> J10	<input type="checkbox"/> J14		
③ TR measuring card version	<input checked="" type="checkbox"/> TRS (standard, 4I+5U)	<input type="checkbox"/> TR (optional, 5I+4U)			
④ measuring card parameters ²⁾	<input checked="" type="checkbox"/> 5 A				
⑤ power supply voltage	<input checked="" type="checkbox"/> UNI (110/230 V AC/DC)	<input type="checkbox"/> UNIH ³⁾ (110/230 V AC/DC)	<input type="checkbox"/> 24V (24/48 V AC/DC) ⁴⁾	<input type="checkbox"/> 24VH ³⁾ (24/48 V AC/DC) ⁴⁾	<input type="checkbox"/> others - in agreement with manufacturer
Ethernet communication port (standard on each central unit)					
⑥ COM1	<input checked="" type="checkbox"/> X-none	<input type="checkbox"/> RS485	<input type="checkbox"/> CANx2	<input type="checkbox"/> OPTOMM	<input type="checkbox"/> OPTOSM
		<input type="checkbox"/> OPTOP	<input type="checkbox"/> Profibus	<input type="checkbox"/> others	
⑦ COM2	<input checked="" type="checkbox"/> OPTOSM				
⑧ installation method	<input checked="" type="checkbox"/> Z - flush	<input type="checkbox"/> N4 - surface ver. 4	<input type="checkbox"/> M - Mixed	<input type="checkbox"/> ZR - flush in rack cabinet	
⑨ panel-unit cable length	<input checked="" type="checkbox"/> S-1 m	<input type="checkbox"/> L-2 m	<input type="checkbox"/> other		
⑩ IP protection class	<input checked="" type="checkbox"/> IP4X	<input type="checkbox"/> IP54 ⁵⁾			
⑪ communication IEC 61850 ⁶⁾	<input checked="" type="checkbox"/> EX-none	<input type="checkbox"/> EG	<input type="checkbox"/> E2G	<input type="checkbox"/> E	<input type="checkbox"/> E2
		<input type="checkbox"/> OG	<input type="checkbox"/> O2G	<input type="checkbox"/> O	<input type="checkbox"/> O2
⑫ language version	<input type="checkbox"/> PL	<input checked="" type="checkbox"/> EN	<input type="checkbox"/> other - in agreement with manufacturer		

1) the e²TANGO-2000-LRR version requires using the OPTOSM communication card in COM2 for communication with the device on the other end of the protected line.

2) 5A/1A configurable from the software level.

3) Reinforced W1, W2, W3 outputs.

4) Universal card for voltages between 24-48 V AC/DC.

5) Protection class IP54 only available in version with flush and mixed installation.

6) IEC 61850 communication is handled through additional communication connectors in the operator panel

Description of the symbols:

G - equipped with GOOSE communication

E - connection through twisted pair with RJ-45 connector

O - connection through multimode optical fibre with SC/(ST on special order) connector

2 - equipped with two redundant ports in PRP/(HSR on special order) standard

STEP 2

card name	code	slot												
		A	B	C	D	E	F	G	H	I	J	K	L	M
CPU processor card	-	standard in every device												
PSU power supply card - 7 relay outputs	-	standard in every device												
Ethernet communication port	-	standard in every device												
8 binary inputs ¹⁾	8IN	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12 binary inputs ¹⁾	12IN	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8 binary inputs 24-48 V ²⁾	8IN24	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12 binary inputs 24-48 V ²⁾	12IN24	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8 binary inputs 220 V ³⁾	8IN220	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12 binary inputs 220 V ³⁾	12IN220	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8 relay outputs	8OUT	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4 relay outputs, reinforced	4OUTH	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4 analogue inputs 0-10 V	AI10	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4 analogue inputs 4-20 mA	AI20	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4 analogue outputs 0-10 V	AO10	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4 analogue outputs 4-20 mA	AO20	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6 temperature inputs PT100	PTI	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		J6				J10				J14				

1) Card dedicated for 110 V – operational voltage range: 80–390 V DC (276 V AC).

2) Card dedicated for 24 V – operational voltage range: 19–60 V DC.

3) Card dedicated for 220 V – operational voltage range: 176–264 V DC.

additional requirements:
(eg. enhanced cyber-security,
customized plugs, etc.)

STEP 3

Your code:

e²TANGO

①

②

③

④

⑤

⑥

⑦

⑧

⑨

⑩

⑪

⑫

A

B

C

D

E

F

G

H

I

J

K

L

M


N

INSTRUCTIONS FOR FILLING IN THE FORM

STEP 1

The presented table includes basic technical parameters of the e²TANGO-2000 protections. Only 1 item should be selected from each item numbered from 1 to 10. If "other" is selected, enter the ordered value in the corresponding field in STEP 3.


Explanation for step 1.

-  - recommended basic configuration
- OPTOMM - multi-mode fibre optic
- N4 - surface installation ver. 4

STEP 2


The presented table includes a list of available expansion cards and possible places for their installation in the e²TANGO-2000 HV protection central unit. No tick box means that the given card cannot be installed in a given place. Select the cards to be ordered from the list and mark with the "X" slot in which they are to be installed. The cards' distribution should start with the A slot. The unit capacities are marked with a background colour in the table, respectively.

Explanation for step 2.

-  - recommended basic configuration
- maximum 4 cards 8OUT
- maximum 1 AI10 card or 1 AI20 card
- maximum 1 AO10 card or 1 AO20 card
- maximum 1 PT1 card

Describe additional requirements in the designated area.

View of the central unit with a selection of the slot arrangement for expansion cards

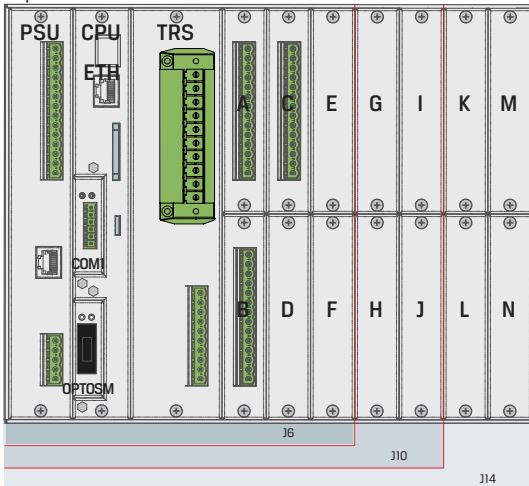

STEP 3

The above-selected parameters of the e²TANGO bay controller should be completed in appropriate fields. The e²TANGO code created in such a way together with other requirements or a scanned page of the form should be sent with the order to: export@elektrometal-energetyka.pl

Example of the e²TANGO-2000 HV protection unit configuration:

- | | |
|---|-------------------------|
| ① e ² TANGO-2000-LRR | ⑨ 8 m cable |
| ② J10 central unit | ⑩ protection class IPX4 |
| ③ TRS measuring card | ⑪ EX-none |
| ④ rated current of the measuring card 5 A | ⑫ EN |
| ⑤ UNI (110/230 V AC/DC) | Ⓐ slot A: card 8IN |
| ⑥ RS485 | Ⓑ slot B: card 8OUT |
| ⑦ OPTOSM | Ⓒ slot C: card 12IN |
| ⑧ mixed installation | |

Example of correct code completion:

e ² TANGO	2000-LRR	J10	TRS	5A	UNI	RS485	OPTOSM	M	8	IP4X	EX	EN
8IN	8OUT	12IN										

ELEKTROMETAL ENERGETYKA SA

67 Działkowa Street

02-234 Warsaw

tel. (+48) 22 350 75 50

fax (+48) 22 350 75 51

export@elektrometal-energetyka.pl

www.elektrometal-energetyka.pl